



Patent
Attorney's Docket No. 003300-973

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of)
TOMAS PUUSEPP *et al.*) Group Art Unit: Unassigned
Application No.: 10/603,655) Examiner: Unassigned
Filed: June 26, 2003) Confirmation No.: 4045
For: A MOBILE BUILDING UNIT AS WELL)
AS A BUILDING AND A METHOD)
FOR CONSTRUCTING THE BUILDING)

CLAIM FOR CONVENTION PRIORITY

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

The benefit of the filing date of the following prior foreign Patent Application in the following foreign country is hereby requested, and the right of priority provided in 35 U.S.C. § 119 is hereby claimed:

Swedish Patent Application No. 0202031-1

Filed: July 1, 2002

In support of this claim, enclosed is a certified copy of said prior foreign Patent Application. Said prior foreign Patent Application is referred to in the oath or declaration. Acknowledgment of receipt of the certified copy is requested.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Date: September 15, 2003

By:

Benton S. Duffett, Jr.
Registration No. 22,030

P.O. Box 1404
Alexandria, Virginia 22313-1404
(703) 836-6620

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

Intyg Certificate



Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande Elekta AB, Stockholm SE
Applicant (s)

(21) Patentansökningsnummer 0202031-1
Patent application number

(86) Ingivningsdatum 2002-07-01
Date of filing

Stockholm, 2003-06-24

För Patent- och registreringsverket
For the Patent- and Registration Office

Kerstin Gerdén
Kerstin Gerdén

Avgift
Fee 170:-

**PATENT- OCH
REGISTRERINGSVERKET
SWEDEN**

Postadress/Adress
Box 5055
S-102 42 STOCKHOLM

Telefon/Phone
+46 8 782 25 00
Vx 08-782 25 00

Telex
17978
PATOREG S

Telefax
+46 8 666 02 86
08-666 02 86

AWAPATENT AB

ELEKTA AB

Kontor/Handläggare

Ansökningsnr

Vår referens

Söderhamn/Bengt Forslin/BF

SE-2028227

1

RADIATION SHIELDING PARTITION UNIT, ROOM AND BUILDING AS
WELL AS A METHOD FOR CONSTRUCTING THE SAME

Field of the invention

The present invention relates to a room enclosed by wall, roof and floor portions for accommodating radiating equipment and for treatment, therapy or diagnosing by means of ionizing radiation, wherein at least one of the wall, the roof or the floor of said room serve as a radiation shielding barrier for preventing radiation at health-impairing levels from escaping to the outside of the room.

The invention also relates to partition units used to construct such a room and to a building containing such a room.

The invention also relates to a method for constructing a building including such a room.

Background of the invention

Installation of radiating equipment, such as equipment for X-ray imaging, radiation surgery or therapy, or radiation sterilization of various products such as e.g. foods or material, is elaborate and time-consuming since the radiation generating equipment must be enclosed by a radiation shielding so that only the patient or the product being treated, is exposed to the high radiation levels necessary. The radiation shielding is normally accomplished by constructing the walls, roof and floor of the room, where the equipment is located, of very thick concrete, often in the order of about 500 mm or thicker. For an existing building this necessitates an extensive reconstruction. Additionally, since the equipment often is very heavy, e.g. equipment for radiation surgery weighs about 20 tons, it may require reinforcement of the floor structure.

An alternative method is to cover the walls, roof and floor with plates of a material with high density, e.g. lead. However, this will be more costly than by using concrete and at least equally heavy.

5 Consequently, the radiation equipment normally is accommodated in a separate building, either as a completely freestanding building or connected to another building, such as a main building of a hospital. However, constructing a completely new building of concrete is
10 elaborate and time-consuming and involves planning, foundation work, concrete casting of the building structure, installation of water pipe system, electrical system, communication system, temperature control system and ventilating system, inner and outer covering of the
15 walls, roof and floor including insulation if any, as well as installation of the radiation equipment in the completed building. Altogether this is a process which often is extended over a period of six months or more.

 Consequently, there is a long implementation time
20 from the decision to acquire new equipment to being able to put it into operation. This is of course a big disadvantage since the radiation equipment and the specially designed building, ties up a large amount of capital and it is naturally desirable to have a rapid
25 yield on invested capital. From the buyers point of view it is therefore of great advantage if the equipment can be put into operation as soon as possible to gain benefit of the investment.

 Another disadvantage with such a specially
30 constructed radiation shielded building is that it is not a flexible solution which can easily be re-allocated to another location, altered in its size or used for another purpose. On the contrary it is very difficult, or even impossible, to move a building of that size with such
35 thick concrete walls and roof, and it is also difficult to rebuild or expand the building, e.g. for another application or just to expand the space for the same or

similar activity, if that is desirable. The only remaining alternative in practice when it is desirable to change the function or location, is therefore often to demolish the building.

5

Summary of the invention

One object of the invention is to provide an improved radiation shielded partition unit, room and building which easily and quickly can be constructed to enable shortening of the time from decision to invest to putting the equipment into operation. It is also an object to provide a radiation shielded room and building which is flexible and which easily can be transferred to another location or by which the size easily can be altered. At least these objects can be achieved with a partition unit according to claim 1, a room according to claim 6 and to a building according to claim 15.

The invention also refers to a method for constructing such a room and/or building with essentially the same objects as above. These objects are achieved with a method according to claim 24.

Accordingly, the invention is based on the understanding that the above-mentioned objects can be achieved by constructing the room and/or building in one or more units, wherein at least one of the walls, floor and roof are designed with an outer and an inner partition element with a space or an accommodation between the partition elements.

In accordance with the invention, partition units are provided that can be used to construct one or more walls, the roof and/or the floor of a radiation shielded room. These partition units have inner and outer partition or wall elements and a space between the partition elements, or may be formed as a cavity, or may be any other configuration which allows a material capable of providing radiation shielding to be inserted

or added to the partition unit once it has been assembled into the room or building.

Because the fillable radiation shielding material can be added after the partition units are already in place at the site, the units are easily transportable. Therefore, the units can be manufactured at an industry plant or construction site, remote from the final location or operating site of the building, and thereafter transferred to the operating site and assembled there. The partition units may be transferred to the operating site as separate partition units, e.g. wall, roof or floor units, which are assembled to a room or a building at the operating site or installed as barrier elements in an existing building. The partition units may also be assembled into building units, including e.g. one or more walls, roof and floor, at the constructing site and transferred in an assembled state to the operating site. During the manufacture of the units, the foundation work at the operating site may be prepared so that when both the foundation work and the units are completed, the units are transferred to the operating site and assembled.

When the assembling is finished, the spaces between the inner and outer partition elements may be filled with any fillable material capable of providing radiation shielding when contained within the partition unit. Suitable fillmaterial include a liquid, e.g. water, or a particulate or grain shaped solid bulk material, e.g. sand.

By letting the fillable material form an essential or a main part of the radiation shielding barrier between the radiation equipment and the environment, the units will have a comparatively low weight in a state where the spaces in the walls, roof and/or floor are unfilled. This enables transport of the units by truck, train or boat from the construction site to the operating site. Not until the units are installed and assembled at the

operating site, the radiation shielding is arranged by filling the fillable material in the spaces in the partition units.

5 This also enables removal or re-allocation of the building, if so desired, by easily emptying the fillable material and thereafter loading the building units on a carriage.

10 The radiation shielded building may be formed in one single unit but generally, the required size will make it advantageous to assemble the building by connecting two or more mating units to each other. In a hereafter shown and described preferred embodiment of the invention, the radiation shielded building is composed of two mating, "container-like" building units forming a radiation
15 shielded treatment room for treatment of a patient. The building also comprises an operator room accommodated in a third building unit, but that third building unit need not be radiation shielded since no radiation is generated in the operator room. However, the wall between the
20 operator room and the treatment room must of course be radiation shielded. In the preferred embodiment this has not been accomplished by a fillable material in a space in the wall, but through a sandwich wall structure with absorbing metal plates, e.g. steel plates.

25 The width of the space in the walls, roof and/or floor is dependent on for instance the type of radiation, the radiation intensity and the type of material used as a fillable material. In the exemplified embodiment, water is used as a fillable material in a building adapted for
30 radiation surgery with gamma-radiation and in that case a space of between 500 to 1500 mm is generally sufficient.

When using water as a fillable material, the spaces in the walls, roof and/or floor of the building preferably are formed as closed spaces or "tanks" to
35 prevent leakage or evaporation of the water. In the preferred embodiment a thin layer of insulation is arranged on the inside as well as the outside of the

walls and roof. To ensure a comfortably indoor climate and to prevent freezing of the water to ice during winter, the water in the spaces may be connected to a temperature controlling system for warming the water during the cold season and possibly cooling the water during the warm season.

The water in the partition spaces may also be automatically monitored, by a water levelling system, to eliminate the risk of unintentional lowering of the water level due to leakage or the like, and resulting deteriorated radiation shielding protection.

In the preferred embodiment the partition elements in the walls and roof are made of sheets of steel applied on a system of steel beams. To prevent corrosion an additive preferably is added to the water. However, it would be possible to make the partition elements of other materials, such as for example concrete, possible in combination with plastic film to ensure impermeability to water.

In the preferred embodiment, three of four walls and the roof include waterfilled spaces. The wall between the treatment room and the operator room does however not include a waterfilled space, since the radiation from the radiation surgery equipment, for which the building is adapted, is low in the area behind the equipment and therefore the necessary radiation shielding can be achieved by a comparatively thin layer of steel sheets. Neither the floor is provided with a waterfilled space since the building is adapted to be placed on a foundation in form of a concrete slab which will provide for the necessary radiation shielding. It is to be understood, however, that a building according to the invention may be constructed with spaces filled with various materials in all of the boundary elements defining the building. It would also be possible to have only some of the walls provided with material-filled

spaces, whereas the roof are in the form of e.g. a solid concrete plate which is placed on top of the walls.

When using a pulverous or granular material, such as sand, instead of a liquid, as a radiation shielding material, the walls, roof and/or floor of the building may have another design. Among other things the spaces need not be hermetical closed to prevent evaporation. Generally, the inlet as well as the outlet openings need to be of a larger dimension since a pulverous or granular material, as a rule, are not possible to be pumped, but must be poured or blown into and out from the spaces. The outlet openings may, for instance, be in form of lids in the bottom portions of the walls to allow emptying.

However, as a rule it is more advantageous to use a liquid as a fillable material since then it is easier to monitor unintentionally lowering of the filling ratio of the material, and to prevent unintentionally formation of air pockets, with deteriorated shielding capacity as a result. Naturally, water is preferred as a fillable material as it is a low cost material which is easily accessible in most places.

When assembling the building of two or more building units, it is important that all connection joints between different units will be performed in a sealed manner to prevent radiation from escaping to the environment. This is suitably ensured by forming all connection joints in a labyrinth form.

With a building according to the invention, it is possible to start the construction of the building structure essentially simultaneously with the foundation work. The building structure is preferably constructed at an industry plant and in the preferred embodiment the building is assembled by three different units. Two units forming the radiation shielded treatment room and one building forming a non-shielded operator room. Though preferred, but not necessary, all units are assembled at the industry and are provided with electrical system,

communication system, temperature control system, ventilating system, as well as inner and outer covering of the walls, roof and floor including insulation if any. However, as an alternative, some of the installation may
5 be performed at the operating site if that is desired. That is the case for instance with the installation of the radiation equipment, which often is both heavy and sensitive, and will normally be postponed until the building is situated at the operating site. The same
10 applies normally for computers and other sensitive equipment. Of course such sensitive equipment may also be preinstalled if care is taken during transportation and handling.

In the preferred embodiment the building thereafter
15 is disassembled at the constructing site, into the three separate units and transported to the operating site where they are assembled on the foundation. Finally the radiation equipment, computers and the like, are installed after which the building and the equipment is
20 ready to be taken into operation.

In the following detailed description of a preferred embodiment of the invention, a radiation shielded building adapted for use in radiation surgery of human beings is described. However, it is to be understood that
25 the building according to the invention is applicable for any kind of radiation equipment, e.g. equipment for treatment of animals or foods or any other type of living organism or nonliving material.

30 Brief description of the drawings

The invention will now be explained by way of example with reference to the accompanying drawings, in which:

Fig 1 is a perspective view of a building adapted for
35 radiation treatment, including a building unit according to the invention,

Fig 2 is a cross sectional plan view from above of the building in fig 1, and
Fig 3 is a cross sectional side view along the line III-III in fig 2.

5

Detailed description of a preferred embodiment of the invention

In the drawings is shown a preferred embodiment of a building, according to the invention, adapted especially
10 for radiation surgery treatment of human beings. The building is assembled of three separate building units 1, 1', 2, of which only the outer contour of the building unit 1' is shown in fig 1. A treatment room 3 is jointly formed by the building units 1, 1' and an operator room 4
15 is formed by the building unit 2.

The building units 1, 1', 2 has each, in the preferred embodiment, a length in the order of about 6-9 m, a width of about 3-4 m and a height of about 4-5 m. Dimensions that makes them well suited for transportation
20 on roads or railways as well as by sea.

As evident by the drawings, the building units 1, 1' are essentially identical but reversed and include wall portions on three of their four sides, a floor and a roof portion. The fourth side of each of the building units is
25 open in order to mutually define a comparatively large treatment room 3 when placed adjacent each other. A radiation generating unit 5 for radiation surgery is placed in the treatment room 3 as shown in fig 2 and 3. Accordingly, the treatment room 3 has to be provided with
30 a radiation shielding to prevent radiation from escaping from the treatment room to the environment and to the operator room 4.

The radiation shielding for three of the wall portions 6, which are faced toward the outside, and for
35 the roof portion 7 of the treatment room, is accomplished by each having a double walled structure with an inner partition element 8, an outer partition element 9 and a

space 10 forming a closed tank between the inner and outer partition elements 8,9. The partition elements are formed of steel plates or sheets on a system of steel beams, with a space of about 800 to 1400 mm between the plates. The tank 10 may be unitary and common for a whole building unit 1, 1', but it may also be subdivided into smaller tanks. However, the tanks are separate for each of the building units 1, 1'. Each tank forms a closed, liquid tight container for water which is fillable through not shown inlet openings.

The radiation shielding in the intermediate wall 11 between the treatment room 3 and the operator room 4, on the other hand, is provided by a sandwich wall structure including steel plates on a system of steel beams. Between the treatment room 3 and the operator room 4 is also a door 12 which is made of lead to give sufficient radiation shielding.

The floor portion 13 of the building unit 1, 1' is in form of a steel plate and does not in itself have sufficient radiation shielding capacity. However, the floor portion 13 is adapted to interact with a not shown foundation to give the required radiation shielding.

The wall and roof portions 6, 7 of the building units include inner and outer insulation layers as well as inner and outer covering layers. The building unit 2 also include a recess or accommodation 16 adapted for installation of e.g. ventilation and temperature controlling equipment.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25

CLAIMS

1. A partition unit for shielding against radiation comprising inner and outer partition elements (8, 9)
5 having a space (10) therebetween, said space being capable of being filled with a material that with the inner and outer partition elements provides a shield against health-impairing levels of radiation.
- 10 2. A partition unit according to claim 1, wherein the space (10) forms a closed, liquid impermeable tank.
3. A partition unit according to claim 2, wherein the tank contains water.
- 15 4. A partition unit according to claim 3, wherein it comprises a system for monitoring the water level.
5. A partition unit according to claim 1, wherein
20 the space (10) contains sand.
6. A radiation shielding room in which at least one of the walls, the roof or the floor comprises a partition for preventing radiation at health-impairing levels from
25 escaping to the outside of the room, said partition being provided with an interior space (10) for receiving a material which with the partition walls provides a barrier preventing passage of health-impairing levels of radiation.
- 30 7. A radiation shielding room according to claim 6, wherein it is assembled of two or more partition units.
8. A radiation shielding room according to claim 6,
35 wherein the interior space (10) forms a closed, liquid impermeable tank.

9. A radiation shielding room according to claim 8, wherein there are two or more separat tanks (10) enclosing the room.

5 10. A radiation shielding room according to claim 8, wherein the tanks (10) contains water.

10 11. A radiation shielding room according to claim 10, wherein it comprises a system for monitoring the water level.

15 12. A radiation shielding room according to claim 10, wherein it comprises a system for temperature control of the water.

13. A radiation shielding room according to claim 6, wherein the spaces (10) contains sand.

20 14. A radiation shielding room according to claim 6, wherein it is adapted for treatment of humans.

25 15. A building including at least one room (3) enclosed by wall (6), roof (7) and floor (12) portions for accommodating radiating equipment (5) for treatment, therapy or diagnosing by means of ionizing radiation, wherein at least one of the walls, the roof or the floor of said building (1, 1') serve as a radiation shielding barrier for preventing radiation at health-impairing levels from escaping to the outside of the building structure, wherein at least one of the walls, the roof or the floor comprises a double walled structure comprising an inner (8) and an outer (9) partition element with a space (10) therebetween, and a filling inlet through which the space is fillable with a fillable material, in order to reduce weight and facilitate transportation of the assembled building with the space in an emptied state, and to allow filling of the space with the

fillable material once the building is located at a site, where it is to be used, to provide a radiation shielding barrier with a sufficient shielding capacity.

5 16. A building according to claim 15, wherein it is assembled of two or more building units (1, 1').

10 17. A building according to claim 15, wherein the space (10) forms a closed, liquid impermeable tank.

 18. A building according to claim 17, wherein there are two or more separate tanks (10) in the building.

15 19. A building according to claim 17, wherein the tanks (10) contains water.

 20. A building according to claim 17, wherein it comprises a system for monitoring the water level.

20 21. A building according to claim 17, wherein it comprises a system for temperature control of the water.

25 22. A building according to claim 15, wherein the spaces (10) contains sand.

 23. A building according to claim 15, wherein it is adapted for treatment of humans.

30 24. In a method for constructing a room for radiation delivery equipment, the improvement comprising constructing one or more walls, the roof and/or the floor by forming a partition having an inner and an outer partition element (8, 9) and a space (10) bounded by the partition elements, placing said partition in the desired
35 location for the wall, roof or floor and filling the space with sufficient radiation shielding material to provide a radiation shield.

25. A method according to claim 24 for constructing a building of the type including at least one room (3), enclosed by wall (6), roof (7) and floor (12) portions, adapted for accommodating radiating equipment (5) for treatment, therapy or diagnosing by means of ionising radiation, including to construct at least one of the walls, the roof or the floor of said building as a radiation shielding barrier for preventing radiation at health-impairing levels from escaping to the outside of the building structure during operation of the radiating equipment, including the steps to construct at least one of the walls, the roof or the floor as a double walled structure comprising an inner (8) and an outer (9) partition element with a space (10) therebetween, and to fill the space with a fillable material to provide a radiation shielding barrier with a sufficient shielding capacity.

26. A method according to claim 25, including the further steps to manufacture the building (1, 1') at a constructing site, to transport the building to an operating site, and not until then to fill the spaces (10) with the fillable material.

27. A method according to claim 24, including the further step to fill the spaces (10) with water.

28. A method according to claim 24, including the further step to fill the spaces (10) with sand.

29. A method according to claim 24, including the further step to use the building for treatment of humans.

Abstract

The invention relates to a building including at least one room (3) enclosed by wall (6), roof (7) and floor (12) portions for accommodating radiating equipment (5) and for treatment, therapy or diagnosing by means of ionizing radiation. At least one of the walls, the roof or floor of said building (1, 1') serve as a radiation shielding barrier for preventing radiation at health-impairing levels from escaping to the outside of the building structure. At least one of the wall, the roof or floor of the building has the form of a double walled structure comprising an inner (8) and an outer (9) partition element with a space (10) therebetween. The building also has a filling inlet through which the space is fillable with a fillable material, in order to reduce weight and facilitate transportation of the assembled building with the space in an emptied state, and to allow filling of the space with the fillable material once the building is located at a site, where it is to be used, to provide a radiation shielding barrier with a sufficient shielding capacity. The invention also relates to a radiation shielding partition unit, a room and a method for constructing the same.

25

Selected for publication: Fig 2

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

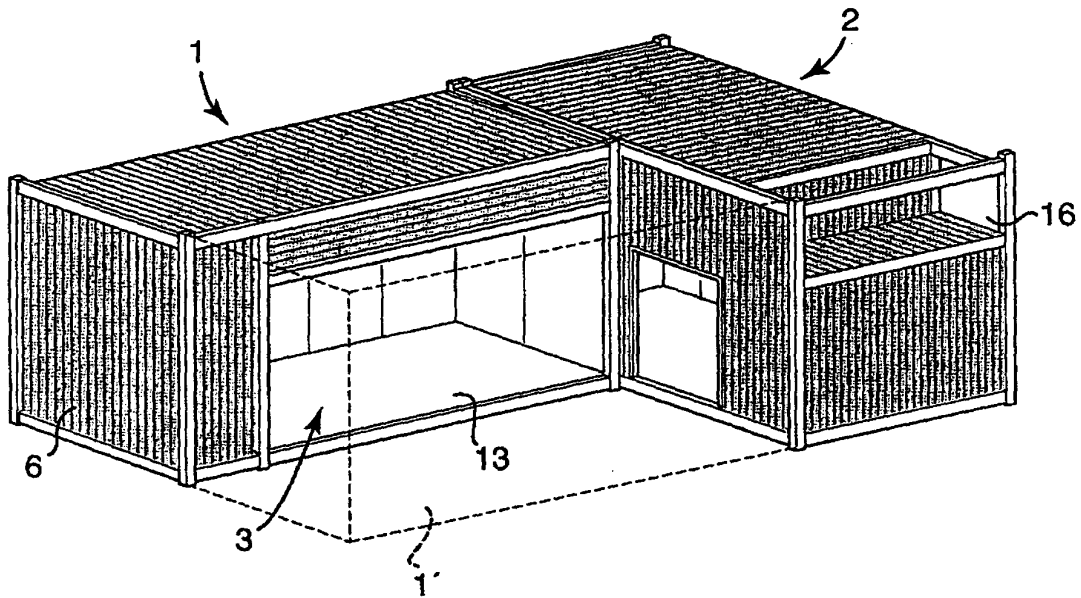


Fig 1

Fig 2

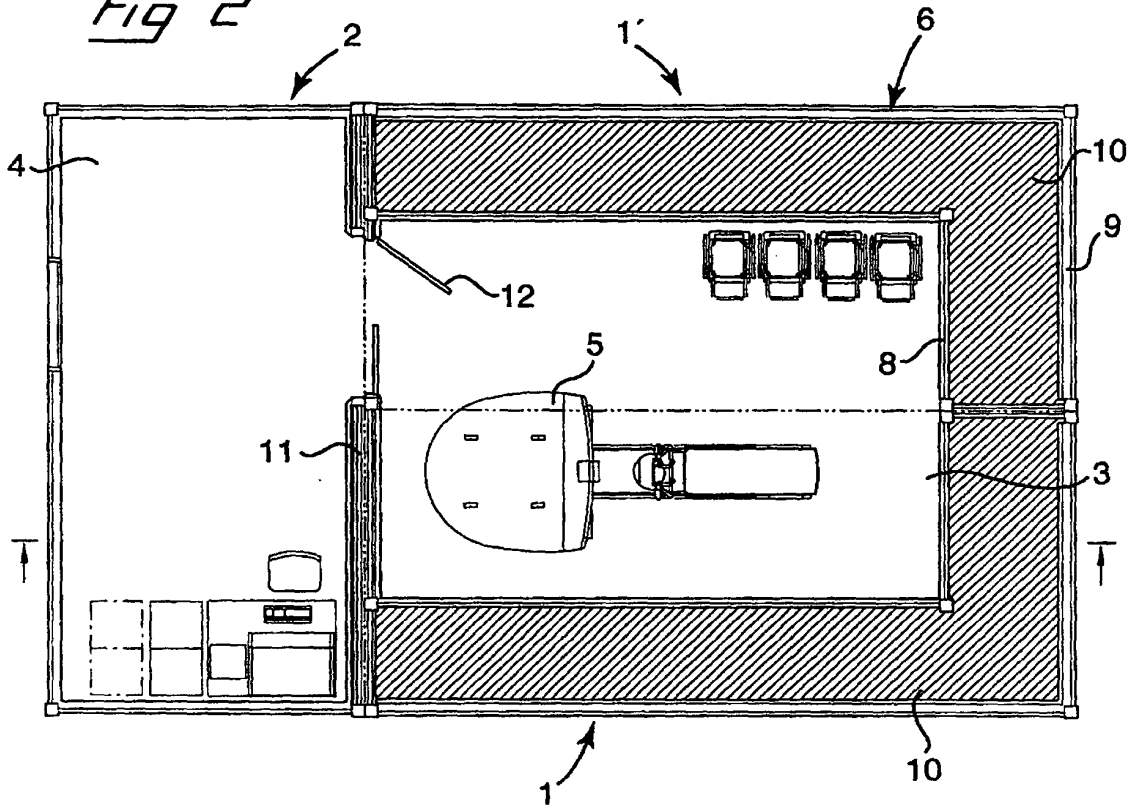


Fig 3

